
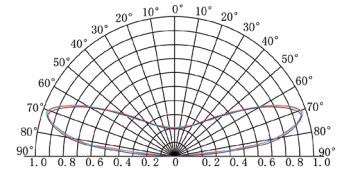


Datasheet OX-signage 1V ECO 170gr.

LED: Osram SMD2835

Lichtbeeld

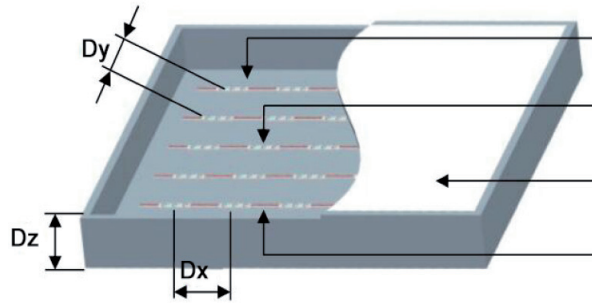


Toepassingen & opties

Technische Tekening


Diepte(mm)	Module afstand(mm)	Dichtheid (aantal leds/m ²)	Lichtsterkte(lux)
DZ=30	DX=60 DY=60	278	3200-3500
DZ=40	DX=75 DY=75	178	2700-3000
DZ=50	DX=90 DY=90	123	1800-2100
DZ=60	DX=110 DY=90	101	1300-1600

*Lichtdoorlaat acrylaat was 55%, data is alleen ter referentie!



A (mm)	B(mm)	H (mm)
36	17,5	6,2

String (20 modulen) = 2950

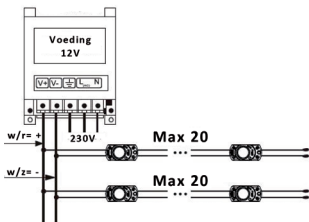

Bestel info

Opties

Output LM	Vermogen	Module	Kleur	String	Artikelnr.
40	12V - 0,40W	1 led	6500K	20 modules	81.95.1701

- 0 - 10V dim
- Draadloos Mesh netwerk
- Lichtsensoren
- Bewegingssensoren
- Noodverlichting
- Kelvin LED in 5000K

Toebehoren	Drivers			Maatvoering	
OVH-20W 12V	Budget	45x	wit	118x35x26	84.02.2012
GEPS 60W 12V	G.E	135x	wit	240x43x30	84.40.6012
OT 120W 12V	Osram	270x	wit	208x72x38	84.01.4120
OVH-25W 12V DIM	LPF	56x	wit	148x40x32	84.12.2512



OVERHUY'S VERLICHTING
Betrouwbaar Duurzaam Energiezuinig

contactgegevens

